

FLEXIBLE SIDED LADDERS - COMPACT



Flexible sided ladders are a cost effective, lightweight solution for temporary access to confined spaces and difficult to reach locations. Even with minimal training, ladders can easily be transported and rapidly deployed for use. Personnel utilizing ladders should always use a separate fall protection system for safety.

Construction:

The rungs are hollow tubes with a dowel insert. Rungs are secured to the side wire ropes with pins and resin. A pin is driven through the center of the rope into the dowel, and set in resin to form a solid block inside the rung. A plastic cap is then pushed in to seal the rung end. Black rungs are cut to size and drilled before treatment to ensure that the alloy tube is 100% anodized.

Compact Ladders

General purpose ladder for ascending/descending. Used for applications such as manhole entry, caving, and access to lighting truss. With fitness and a little practice, they are easy to climb.

Key Features:

Standard lengths are 5 m and 10 m • Other lengths made to order • Can be connected together for longer lengths • Easy to carry and store • Swaged eye ends • Accessories available • Two rung spacing options • Rungs are 6.0" wide • Aluminum rungs are 0.50" Diameter • Requires a separate fall protection system

Plain Finish Rung, 4 mm Galvanized Steel Cables, Swaged Eye Ends


5 m long w/25 cm rung spacing	2.87 lbs (1.300 kg)	LD39001
5 m long w/30 cm rung spacing	2.65 lbs (1.200 kg)	LD39002
10 m long w/25 cm rung spacing	5.73 lbs (2.600 kg)	LD39003
10 m long w/30 cm rung spacing	5.29 lbs (2.400 kg)	LD39004

Plain Finish Rung, 3 mm Galvanized Steel Cables, Swaged Eye Ends

5 m long w/25 cm rung spacing	2.20 lbs (1.000 kg)	LD39005
5 m long w/30 cm rung spacing	1.98 lbs (900 g)	LD39006
10 m long w/25 cm rung spacing	4.41 lbs (2.000 kg)	LD39007
10 m long w/30 cm rung spacing	3.97 lbs (1.800 kg)	LD39008

Black Anodized Rung, 4 mm Stainless Steel Cable, Swaged Eye Ends

5 m long w/25 cm rung spacing	2.87 lbs (1.300 kg)	LD39041
5 m long w/30 cm rung spacing	2.65 lbs (1.200 kg)	LD39042
10 m long w/25 cm rung spacing	5.73 lbs (2.600 kg)	LD39043
10 m long w/30 cm rung spacing	5.29 lbs (2.400 kg)	LD39044

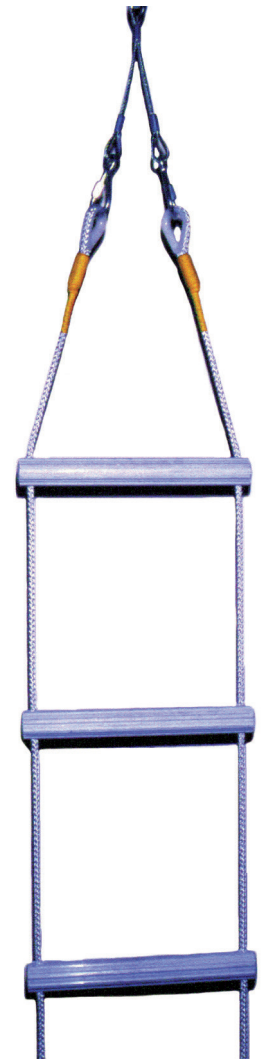

Alloy-Plain Finish



Black Anod Al



GRP

Pigeon Mountain Industries, Inc. | PO Box 803, LaFayette, GA 30278 | Fax: 706-764-1531 | Email: custserv@pmirope.com

A large, empty rectangular box with a thin black border, intended for handwritten notes or a signature.

Pigeon Mountain Industries, Inc. | PO Box 803, LaFayette, GA 30278 | Fax: 706-764-1531 | Email: custserv@pmirope.com