

A removable and reusable rolling I-beam anchor, easy to place and remove. This anchor is designed to easily roll along the beam while trailing the worker.


Key Features:

- Sealed ball bearing wheels
- Polyester sling
- 360 degree swivel d-ring
- 3"-10" range
- Stainless lockout screws
- Easy installation
- Extreme strength
- Rated to 22kN

Weight: 7.70 lbs (3.493 kg) » MBS: 22 kN (5000 lbf)

HD26243

COMPLIANT ANSI Z359.1 (2007) EN 795

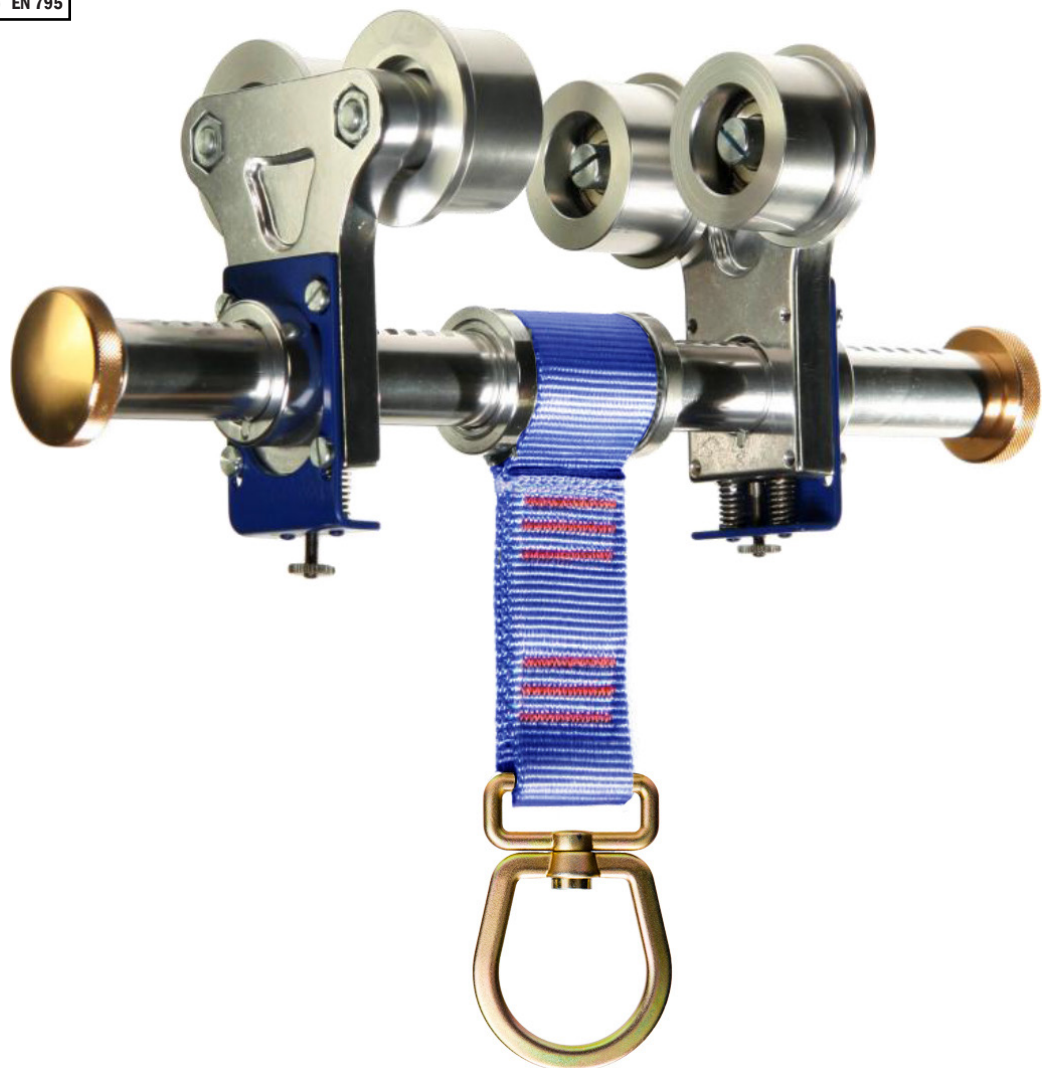

Pigeon Mountain Industries, Inc. | PO Box 803, LaFayette, GA 30278 | Fax: 706-764-1531 | Email: custserv@pmirope.com

A large, empty rectangular box with a thin black border, intended for handwritten notes or a signature.

Pigeon Mountain Industries, Inc. | PO Box 803, LaFayette, GA 30278 | Fax: 706-764-1531 | Email: custserv@pmirope.com