

YOU COULD BE KILLED OR SERIOUSLY INJURED IF YOU DO NOT READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE USING PRODUCT. SPECIAL TRAINING AND KNOWLEDGE ARE REQUIRED TO USE THIS PRODUCT. YOU MUST THOROUGHLY READ AND UNDERSTAND ALL MANUFACTURER'S INSTRUCTIONS BEFORE USE. USE AND INSPECT THIS PRODUCT ONLY IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS. YOU CAN CONTACT THE MANUFACTURER AT 706-764-1437 FOR IMPORTANT SAFETY INFORMATION.



Pigeon Mountain Industries, Inc

PO Box 803
LaFayette, GA 30728 USA

Toll Free 800.282.7673
Phone 706.764.1437
Fax 706.764.1531
E-Mail info@pmirope.com
Web www.pmirope.com

Two models of the uniform belt are available. Both are made of 1^{3/4}" black webbing, and have a 7,000lb minimum breaking strength. Basic model is one size fits most, and can be trimmed by user to fit. The second version features hook and loop fasteners to secure the free tail, and is available in two sizes. Belt is not intended to be used as an emergency harness but as a back-up, or last resort.

SG51039 - Basic (fits up to 48")
SG51139 - Standard w/hook and loop tail (27" to 40")
SG51140 - Large w/hook and loop tail (36" to 56")

PMI products are warranted to the original retail purchaser to be free from defect in material and workmanship for a period of one year. PMI will repair or replace the item without charge provided inspection at our factory discloses no misuse or alteration, which, in our judgement, has affected the condition or functioning of the product. All implied warranties imposed by law in connection with the sale of PMI products are also limited in duration to a period of one year. PMI expressly excludes and shall not be liable for any consequential damages arising out of any breach of the express or implied warranties on sales of PMI products. Because of the high risks involved in high angle rope work such as, but not limited to, rescue, rope access, caving, rappelling, rock climbing and mountaineering, no further warranties exist or are implied by PMI. Regulations issued under the Magnuson-Moss Warranty Act require us to include the following statement: some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you.

PMI LIMITED WARRANTY



UNIFORM BELT

PIGEON MOUNTAIN INDUSTRIES

USER INFORMATION

- *Belt should be allocated to a single user.
- *To ensure a good fit, try on and adjust belt appropriately prior to use.
- *Keep belt from contact with harsh chemicals or corrosive substances.
- *Avoid excessive abrasion.
- *Compatibility with other equipment must be verified by the user.
- *Repair or modification of this product without manufacturers' express written consent is strictly forbidden.

INSPECTION FOR USE

Inspect the belt prior to each use, paying special attention to load bearing buckles and components. Inspection criteria should be established by the user according to his needs, and must consider at least the following hazards:

- *Missing or torn components
- *Improperly functioning buckles or attachment points
- *Webbing and/or stitching that shows excessive wear
- *Chemical damage or exposure
- *Heat damage

MAINTENANCE AFTER USE

Store belt loosely packed in a clean, dry environment

A wet belt should be thoroughly dried before storage

Do not expose the belt to direct flame or high temperature

Do not expose the belt to chemicals or damaging substances

Belt may be hand or machine washed (gentle) in cool water. Use clear water or a non-detergent cleanser, and rinse thoroughly

REMOVAL FROM SERVICE

Remove the belt from service and destroy, if it does not pass inspection or if there is any doubt about the safety or serviceability of the belt. If any of the following conditions are true, the belt must be discarded:

- *If the belt has sustained a significant fall (i.e., fall factor 1 or greater)
- *The load bearing components of the belt are damaged in any way
- *Stitching shows excessive wear, is cut, or is otherwise affected in a way that might affect belt function or performance
- *Buckles or attachment points do not function properly, show signs of excessive wear or damage that might affect belt function or performance

*If webbing is not properly rigged, shows damage or dysfunction that might affect belt performance


*If the belt has been visibly damaged by heat, chemical or other hazardous condition

*If belt is too short to allow at least 4 inches of extra material after the buckle is properly threaded


*If the belt has been in use for 5 years, regardless of condition

SIZING INFORMATION

Don the belt while wearing the uniform or clothing it is intended to be used with. Fasten the end of the belt through the buckle as illustrated in figure 1.

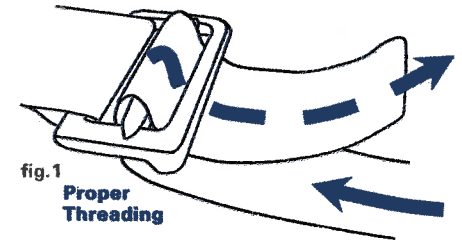

Do not fasten using the un-secure method shown in figure 2. A single pass through the buckle even with the addition of hook and loop fasteners on the tail is not secure.

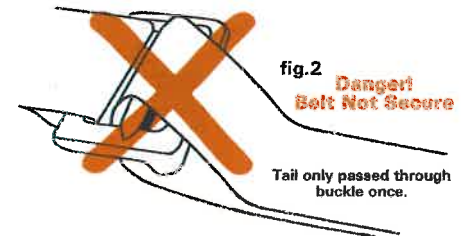

Excess belt may be tucked through belt loops.

On the models without hook and loop tails excess can be trimmed off as long as at least 4" is left after trimming. The hook and loop models should not be trimmed shorter.

Be sure to leave at least 4" of extra belt once fastened through the buckle.

IMPORTANT

* Inspect before use! Inspect the belt upon receipt to ensure that it has not been damaged during shipment and to verify that buckle is working properly.

* Failure to comply with the instructions and information in this booklet may result in injury or death.

*CAUTION: Even when used in accordance with instructions, use of this belt for emergency escape may result in personal injury.