

CLIMBING TECHNOLOGY ROLLNLOCK



Ultra-light pulley / rope clamp (only 80 g!) designed for work, rope climbing maneuvers, rescue and self-rescue situations.

Key Features:

Mobile side plates for the rope or on sling placement • Spring operated cam for use as a rope ascender • Sliding lock for use as a pulley • Ideal for the crevasse rescue • It allows the hauling of light loads • Developed to work also on wet or dirty ropes • It can be used to adjust the positioning on webbing or daisy chain.

Weight: 2.8 oz (80 g)


MBS: 20 kN (4496 lbf)

Sizing Info: 8 mm - 13 mm rope / 10 mm - 16 mm webbing

Max Rope Size: 13 mm

HD26250

COMPLIANT CE EN 12278 EN 567

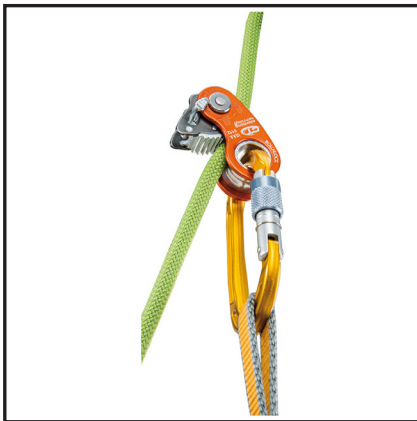

Pigeon Mountain Industries, Inc. | PO Box 803, LaFayette, GA 30278 | Fax: 706-764-1531 | Email: custserv@pmirope.com

A large, empty rectangular box with a thin black border, intended for handwritten notes or technical drawings.

Pigeon Mountain Industries, Inc. | PO Box 803, LaFayette, GA 30278 | Fax: 706-764-1531 | Email: custserv@pmirope.com